


Q7 Introduction

- The Qseven™ concept is an off-the-shelf, multi vendor, Single Board Computer that integrates all the core components of a common PC and is mounted onto an application specific carrier board.
- Qseven™ modules have a standardized form factor of 70mm x 70mm and have specified pinouts based on the high speed MXM system connector that has a standardized pinout regardless of the vendor.
- The Qseven™ module provides the functional requirements for an embedded application. These functions include, but are not limited to, graphics, sound, mass storage, network and multiple USB ports. A singleruggedized MXM connector provides the carrier board interface to carry all the I/O signals to and from the Qseven™ module.

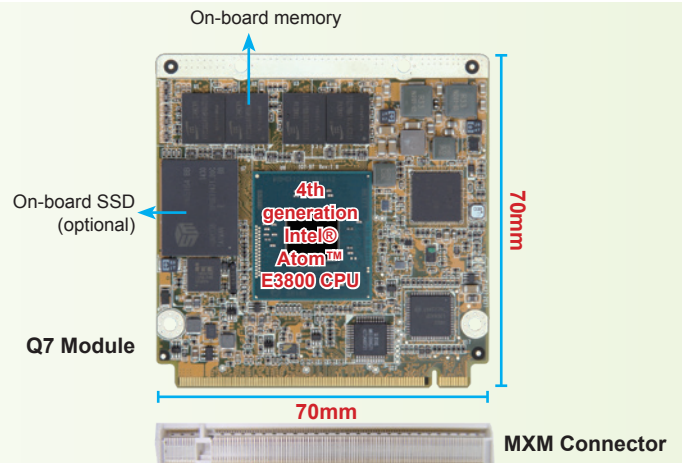

The New Module Standard

Compact, Square & Cost Efficient
Module Concept for Ultra Mobile Applications

- Low Cost
- Low Power Consumption
- Legacy Free
- Fast Serial Interfaces

ETX, COM Express and Q7 Comparison Table

Platform	ETX 3.0	COM Express Type II Basic Module	Q7
Size	95 x 114 mm	95 x 125 mm	70 x 70 mm
Connector	4 x 100-pin	2 x 220-pin	1 x 230-pin
Memory	1 x SO-DIMM	1 x SO-DIMM	on board memory
VGA	Yes	Yes	N/A
LCD	TTL or LVDS	Up to two single LVDS or Dual-channel LVDS	SDVO/HDMI/DP (Shared)
Expansion	PCI & ISA	PCI & PCI Express	PCI Express
Ethernet	10/100 Mbps	10/100/1000 Mbps	10/100/1000Mbps
USB	4	8	8
SATA	2 (ETX 3.0 only)	Up to 4 SATA	Up to 2 SATA
IDE	2CH	1CH	N/A
Audio	Mic-In/Line-in/Line-Out	AC97/HD interface	HD interface
Power	5V	12V	5V

Defined Interfaces

- 4 x PCI Express x1 Lanes
- 2 x SATA
- 8 x USB 2.0
- 1 x 1000BaseT Ethernet
- 1 x SDIO 8 bit
- 2 x 24-bit LVDS
- SDVO / HDMI / DisplayPort (shared)
- HDA (High Definition Audio)
- I²C Bus
- LPC (Low Pin Count Bus)
- CAN Bus
- Fan Control
- Power Management Signals
- Battery Management
- 5V Power (TDP 12 Watt)
- Unique API for I²C Bus, Watchdog Timer and EPI (Embedded Panel Interface)
- Thermal Cooling Interface defined

Typical Applications



Automation Controllers



Mobile Devices



Measurement Systems